

BT-AC 100



The buffer tank is used to store thermal energy in a heating system.

These tanks are made up of a black steel tank, suitable for the storage of heating water, but not suitable for the storage of domestic hot water.




Description

- Buffer tank for air conditioning and heating system, without heat exchanger.
- Rigid PU insulation to 73 mm thick, zipped PVC cover finish.
- External casing classified as standard M3 fire.
- 2 years warranty.



BT-AC 100 liters

Model	100 L
Reference	BT0100AC
Total capacity (liters)	101
Weight empty (kg)	34
Rigid PU insulation (mm)	73
Heat loss ΔT 45K (W)	34
Energy efficiency class	A
Maximum working-temperature (°C)	95
Max tank operating pressure (bar)	3

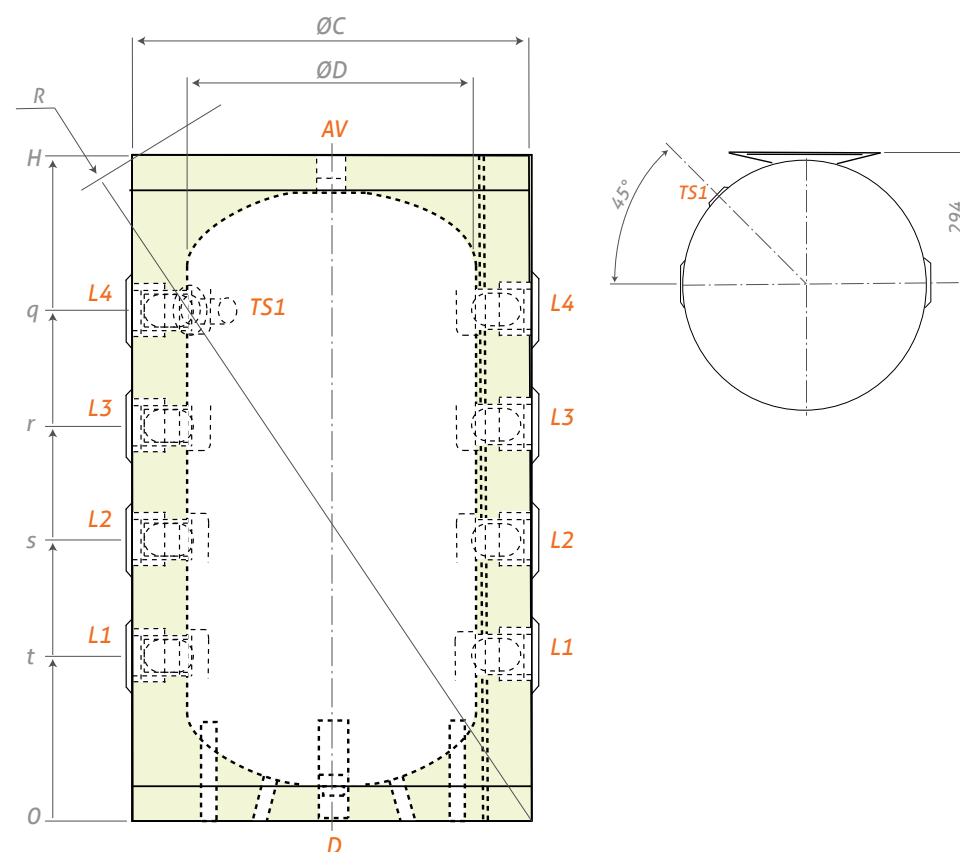

		Model
	Outlet/Inlet tube	100
AV	Air ventilation	3/4"
D	Drainage	3/4"
TS1.2.	Temperature probes	1/2"
L1.2.3.4	Inlet / Outlet	1"1/2

Buffer tank 2 years warranty

Certifications

Made in European Union



Model	ØC	ØD	H	q	r	s	t	u	R
100	550	404	932	710	550	390	230	-	1081

Dimensions (mm)

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

