

BT-AC 1500 TO 2000



The buffer tank is used to store thermal energy in a heating system.

These tanks are made up of a black steel tank, suitable for the storage of heating water, but not suitable for the storage of domestic hot water.





Description

- Buffer tank for air conditioning and heating system, without heat exchanger.
- PEXL insulation 30mm thick, untreated interior.
- External casing classified as standard M1 fire.
- 2 years warranty.



BT-AC 1500 and 2000 liters

Model	1500 L	2000 L
Reference	BT1500AC	BT2000AC
Total capacity (liters)	1420	2013
Weight empty (kg)	240	330
PEXL insulation (mm)	30	
Heat loss ΔT 45K (kWh / 24h)	17.42	21.91
Energy efficiency class	NA	
Maximum working-temperature (°C)	95	
Max heating operating pressure (bar)	6	
Outlets for temperature probes / thermometer	3	

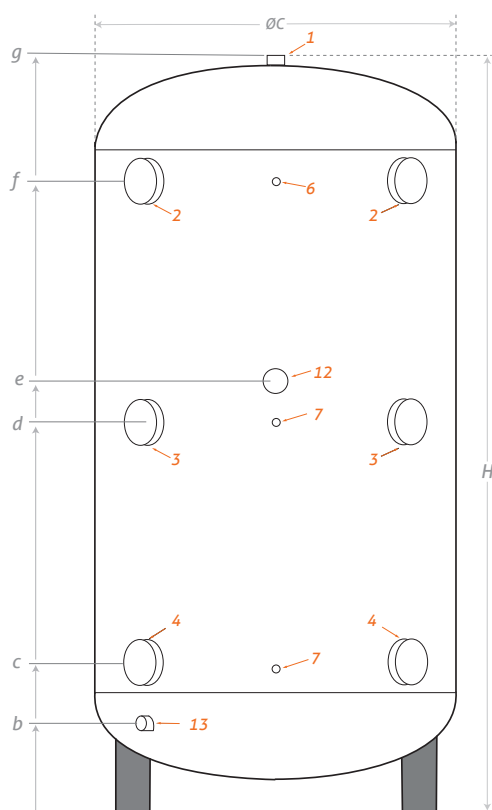

Outlet/Inlet tube	Model 1500-2000
1 Air evacuation	1" 1/4
2 Boiler inlet	4"
3 Heating inlet	4"
4 Boiler outlet - heating at 50°C	4"
6 Thermometer	1/2"
7 Probes	1/2"
12 Electric element	2"
13 Drain	1"

Buffer tank 2 years warranty

Certifications

Made in European Union



Model	ØC	ØD	H	b	c	d	e	f	g
1500	1060	1000	2090	250	415	1080	1180	1745	2090
2000	1160	1100	2405	250	415	1230	1330	2045	2405

Dimensions (mm)

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

