

BVE-LWW 1500 TO 2000

Double heat exchanger - Large area for HP



The BVE-LWW series tanks are specially designed for primary circuit solar systems.

They are also equipped with a large surface heat exchanger (top) suitable for heat pump applications.

The tank and the heat exchangers are made of enamelled steel.


These tanks are to be placed on the ground.



Description


- Enamelled steel sanitary hot water storage tank*, equipped with two heat exchangers with a large aera.
- Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025. Protection by magnesium anode.
- Polyester fiber insulation 100 mm thick, PVC cover finish, removable.
- Optional electric back-up on 1 1/2 connection above the heat exchanger.
- External casing classified as standard M1 fire.
- 3 years warranty, electric part 2 years warranty.

* Sanitary water in compliance with French sanitary regulations particularly DTU 60.1

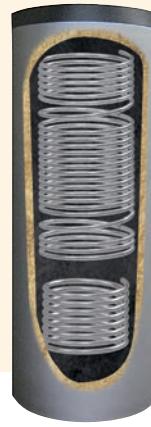


BVE-LWW 1500 and 2000 liters

Model	1500 L	2000 L
Reference	BVE1500LWW	BVE2000LWW
Total capacity (liters)	1390	1900
Weight empty (kg)	395	601
Polyester fiber insulation (mm)		100
Heat exchanger surface S1/S2 (m ²)	3.7 / 6.0	4.3 / 12.0
Heat exchanger volume S1/S2 (L)	23 / 35	26 / 68
Heat exchanger power S1/S2 (kW)	88 / 35	103 / 70
Heating water production at 80-60°C S1 / at 60-50°C S2 (m ³ /h)	3.8 / 3.01	4.4 / 6.02
Domestic hot water production at 10-45°C S1 / S2 (m ³ /h)	2.21 / 0.86	2.5 / 1.72
Pressure loss S1/S2 (mbar)	215 / 45	340 / 90
Energy efficiency class	C	
Maximum tank / heat exchanger working-temperature (°C)	95 / 110	
Max tank operating pressure (bar)	8	
Max working heat exchanger pressure (bar)	10	

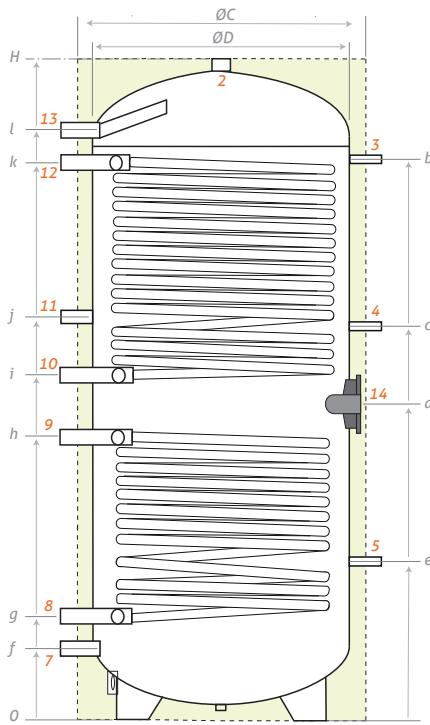

Model	ØC	ØD	H	b	c	d	e	f	g	h	i	j	k	l	n
1500	1200	1000	2185	1820	1235	930	540	280	395	805	1090	1285	1725	1860	230
2000	1300	1100	2470	2025	1325	905	515	260	405	875	1080	1395	1980	2140	230

Dimensions (mm)



Model	Outlet/Inlet tube	1500-2000
1	Hot Water outlet	1" 1/2
2	Anode	1" 1/2
3	Probe - thermometer	1/2"
4	Thermostat	1/2"
5	Thermostat	1/2"
7	Cold Water inlet	1" 1/2
9-12	Heat exchanger inlet	1" 1/4
8-10	Heat exchanger outlet	1" 1/4
11	Recirculation	1"
13	Hot Water outlet	1"
14	Flange with back-up	1" 1/2

Storage tank 3 years warranty

Certifications

Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025
Made in European Union



SYRIUS SOLAR INDUSTRY

15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18

contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

